




Orenco® Septic Tank Effluent Pumping System

Orenco Systems®, Incorporated

1,000 Gallon DEC Configuration

Liftstation Add-On Behind a New or Existing Tank

BILL OF MATERIALS					
1	PE1000SE	PolySeptic 1000G No Baffle, No Outlet	1	JC	Jim Cap, Septic, 4" for Pump Out
1	OSSTEPHDA	Pro STEP Pump Package with HDA			
1	CRRTA	AT Riser/Tank Adapter, 24" ABS			
2	SF	Sika Flex			
12	LAGS	5/16"x1-1/2" galv lag screws			
12	BOLTS	5/16"x1" Stainless Bolts			
12	WASHERS	5/16" Stainless Fender Washers			
2	OSGP	MA320 Glue Pack			
1	MHR12	RISER, 4ft, 2" Insulation, with Ext. Splice Box			
1	UBOLT	3/8" U-Bolt, Tank Lifting Eye			
2	WASHERS	3/8" x 2" Flat Washers			
1	FERNCO54	Coupling, Septic 5x4.5 for Inlet			
1	FERNCO4	Coupling, Septic 4x4 for Pump Out			

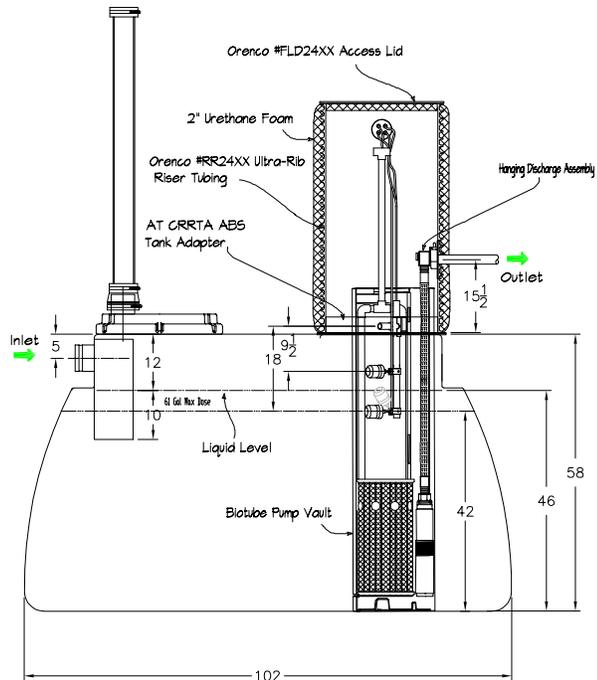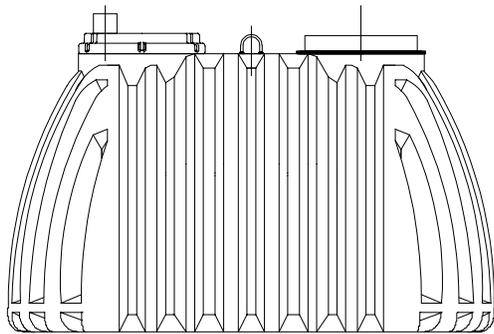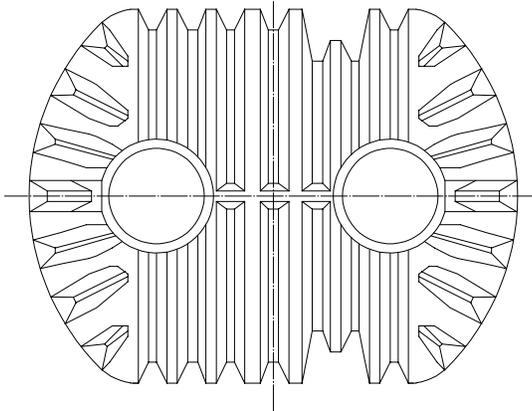

DRAWN: SIMON
 DATE: 10/11/19
 REVISED: 9/10/24
 FILE NAME: GPT_SUBMITTAL
 JOB NO: STANDARD
 SCALE: NTS
 SHEET No. 1
 OF 1

**1000 GREER POLY TANK LIFT
 DEC CONFIGURATION**

**Customer Name
 Job Location**



ANCHORAGE TANK

**2723 RAMPART DRIVE
 ANCHORAGE, ALASKA
 (907) 272-3543**

