




# Steel Septic Tanks

## 4,500 - 10,000 Gallon

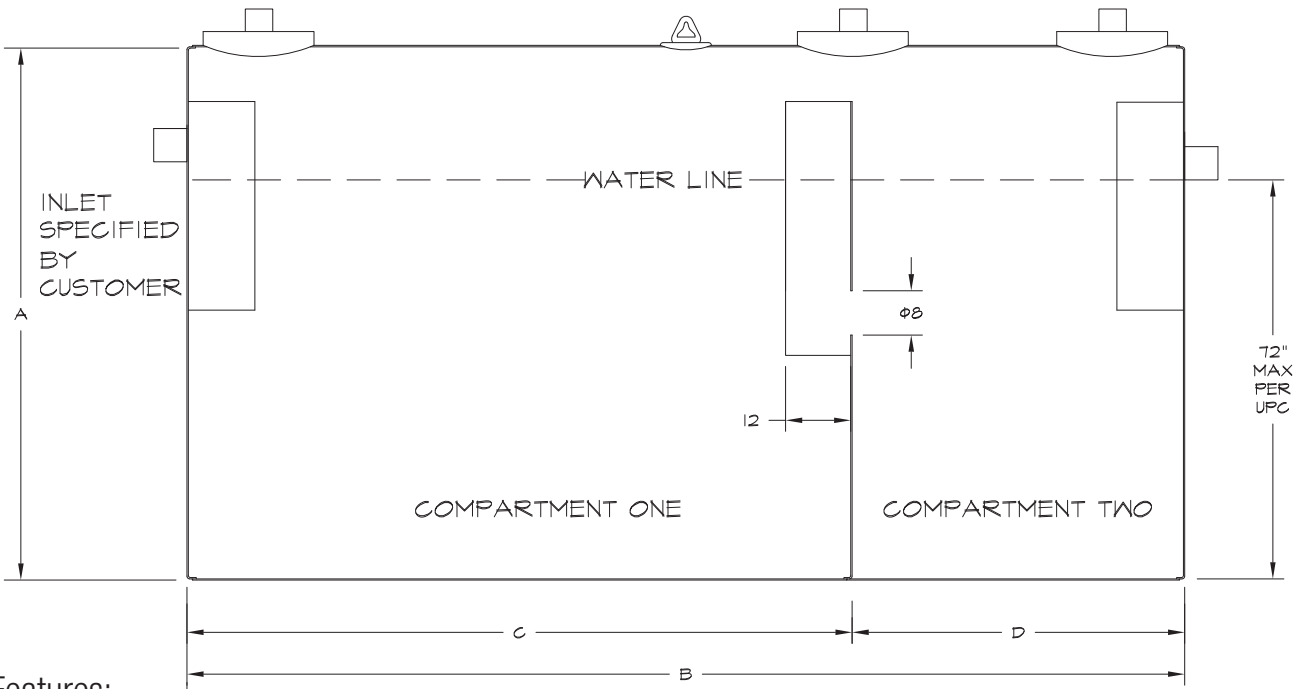

Features:

- Constructed to the requirements of the Uniform Plumbing Code.
- Watertight manholes prevent seeping of groundwater.
- Coated inside and out with coal tar pitch.
- Custom tanks, including special interior and/or exterior coatings, are available.
- Dimensions and weights are approximate.
- 72" maximum liquid depth per Uniform Plumbing Code (DEC often waives this requirement)

ANCHORAGE TANK MODEL NUMBER	APPROX. GALLONS	STEEL GAUGE	DIAM. (INCHES) (A)	LENGTH (FEET) (B)	LENGTH COMPT. 1 (C)	LENGTH COMPT. 2 (D)	SHIPPING WEIGHT (LBS)
AT4500S	4,500	3/16	76	21	14'-0"	7'-0"	4,438
AT5000S	5,000	1/4	96	17	11'-4"	5'-8"	6,937
AT6000S	6,000	1/4	96	20	13'-4"	6'-8"	7,744
AT7000S	7,000	1/4	96	24	16'-0"	8'-0"	8,551
AT7500S	7,500	1/4	96	25	16'-8"	8'-4"	9,088
AT8000S	8,000	1/4	96	27	18'-0"	9'-0"	9,626
AT10000S	10,000	1/4	96	34	22'-8"	11'-4"	11,509